


MONTGOMERY COUNTY RACK INSTALLATION

INSTALLATION INFORMATION

- Pedestrian and ADA thoroughfare should be considered in rack placement.
- Bicycle racks cannot block entrances or exits to buildings.
- Spacing requirements are about 7'L x 4'W per rack and a stable concrete or asphalt surface is needed.
- A specialized security bolt should be utilized to prevent tampering and provide stability.

INSTALLATION INFORMATION

Below is a graphic depicting the Association of Pedestrian and Bicycle Professionals (ABPB) recommended dimensions for bicycle rack areas.

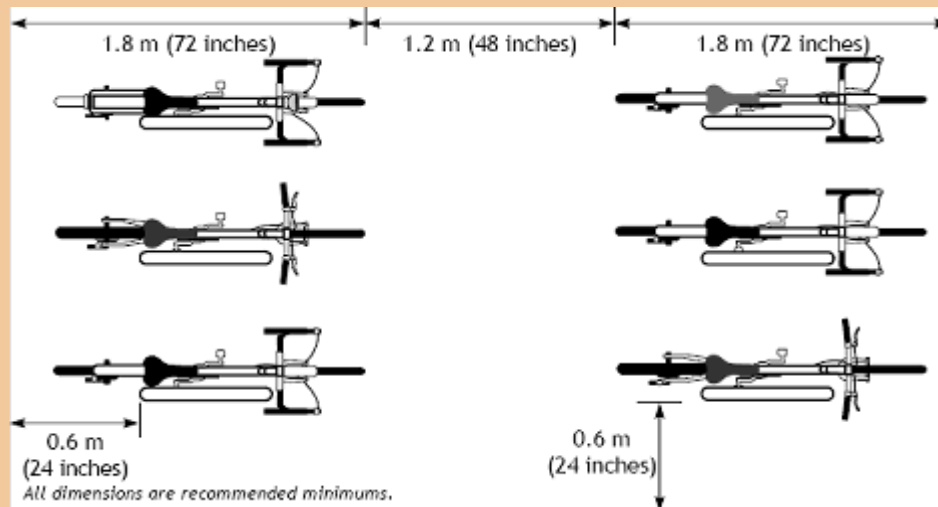

FOR MORE INFORMATION

CONTACT

Bike@montgomerycountymd.gov

VISIT

- www.bikemontgomery.com
- <http://www.fhwa.dot.gov/publications/research/safety/pedbike/05085/chapt17.cfm>